


PX Lighting Control STANDARD PLUS




PROJECT
CATALOG #
TYPE
NOTES

The commercial-grade, multi-tap PX is a high-quality transformer that offers optional on/off control options, such as a photocell or mechanical timer. This standard transformer is available in 150 W, 300 W, 600 W, and 900 W capacities for maximum design flexibility.

Quick Facts

- Commercial-grade, 304 stainless steel construction ensures high-quality performance and long life
- Large terminal block simplifies field wire and photocell installation
- Multiple wattage options offer design flexibility
- UL-379 rating provides added safety when installing near pools and spas
- 12 V to 15 V multi-tap outputs minimize voltage loss
- Various conduit knockout sizes and locations expand installation options
- UL-1838 rating ensures safe lighting installations

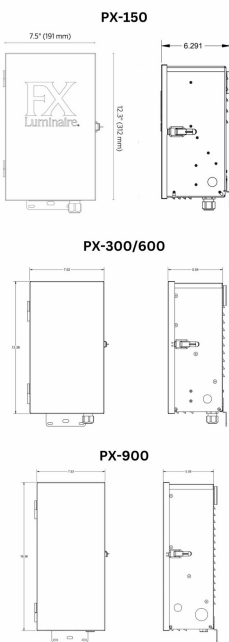

Output	PX-150	PX-300	PX-600	PX-900
Power	150 VA	300 VA	600 VA	900 VA
Input Primary	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz
Input Amperage Primary	1.25 A	3 A	5 A	8 A
Output Voltage Secondary	12 or 15 VAC	11 to 15 VAC	11 to 15 VAC	11 to 15 VAC
Maximum Open Circuit Volts	15 VAC	15 VAC	15 VAC	15 VAC
Class	2	2	2	2

**About FX Luminaire**

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

**Materials**

304 stainless steel

**Finish**

Stainless steel

**Hardware**

Two pan-head, machined mounting screws with plastic anchors. Stainless steel mounting brackets are attached to the transformer box.

**Wiring**

Heavy-gauge, grounded, water-resistant power cord with integrally molded plug; 5' (1.5 m) length. Standard low-voltage lighting wire required (e.g., 12-2, 10-2, etc./2.0 mm, 2.5 mm, etc.) between transformer and lighting fixtures.

**Power**

120 VAC, 60 Hz

**Weight**

PX-150: 18 lb (8.2 kg); PX-300: 20 lb (9.1 kg); PX-600: 25 lb (11.3 kg); PX-900: 42 lb (19.1 kg)

**International Compliance**

None

**Installation Requirements**

Designed for installation on a vertical surface in the upright position only. Transformer must be in a free airspace. Do not install in a small, sealed enclosure or direct bury.

**Warranty**

10-year limited warranty

**Listings**



Fixture	Wattage	Compliance	Switching	Finish
PX	150	[default] 120 V	[blank] No switching option	SS Stainless Steel
	300		PC Photocell	
	600		T Timer	
	900			

-

-






-

-

EXAMPLE FIXTURE CONFIGURATION: PX-XX-XXXX-XX



POWER OPTIONS: Specify Separately

Power	Catalog No.		Power	Catalog No.	
Low-Voltage Dimmer	DIM-LV		FX Luminaire Wi-Fi Plug	FX-WIFI-PLUG	
Luxor Cube - Relay, 0-10V dimming	LCM-RLY-010V		PX Transformer photocell	PX-PC	
Plug-in 24VAC relay	PX-SYNC		Lighting transformer plug-in timer	PX-TIMER	