



PROJECT

CATALOG #

TYPE

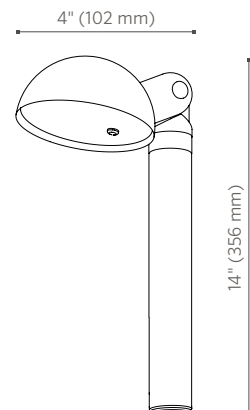
NOTES

GT Path Light STANDARD PREMIUM

The GT is specially designed to make it adaptable to a wide range of lighting needs. With its ability to adjust to any angle, the GT can be used to illuminate pathways, plants, garden art and more.

Quick Facts

- Copper/brass construction
- G4 bi-pin lamp base
- Natural copper/brass or powder coated finishes
- Compatible with Luxor® Technology
- Phase dimmable
- Input voltage: 10-15V



GT Path Light SPECIFICATIONS

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Machined C360 brass knuckle with stainless hardware. Spun C110 copper top/shade and extruded C110 copper riser.

Lamp

G4 lamp base. Preinstalled T3 LED lamp option with G4 base offers a warm 2,700K color temperature with a minimum rated life (L70) 33,000 hours.

Socket

Socket contains Moisture-Block™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length without riser.

Power

Input 10-15VAC/VDC 50/60Hz. Remote transformer required (specify separately).

Riser

¾" (19 mm) copper riser with machined male threads.

Threads

Machined brass fitting with ½"-14 (13 mm) NPSM threads.

Lens

Frosted polycarbonate lens with high tolerance for thermal expansion, stress, and abuse.

Finish

Options of natural copper/brass finish, nickel plate, or polyester TGIC powder coat. Brass accent pieces (knuckle and hardware) remain natural for powder coated finishes.

Hardware

Includes ABS long slotted spike for ground mounting.

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Weight

4.0 lbs. (1.8 kg)

Manufacturing

ISO 9001:2015 certified facility.

Warranty

10-year limited warranty

Control

ZD or ZDC utilizes Luxor technology to zone light fixtures in up to 250 groups, dim each group in 1% increments between 0 and 100%, or change to one of 30,000 colors with RGBW LEDs. Add the Luxor Cube to this fixture to add zoning and dimming capabilities with Luxor.

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Installation Requirements

Designed for installation in the downward lighting direction only.

Listings



GT Path Light ORDERING INFORMATION






Fixture	Lamp	Riser	Finish
GT*	■ NL No lamp	■ 8R 8" (203 mm) Riser	■ CU Natural Copper
	■ LED20W 1.6W LED, 2,700K	■ 12R 12" (305 mm) Riser	■ BZ Bronze Metallic
		■ 18R 18" (457 mm) Riser	■ DG Desert Granite
	■ 24R 24" (610 mm) Riser	■ WI Weathered Iron	
	■ 36R 36" (914 mm) Riser	■ SB Sedona Brown	
		■ FB Black	

EXAMPLE FIXTURE CONFIGURATION: GT-20-36R-CU

GT - [] - [] - []


* Ships with Long Slot Spike (250015840000)

MOUNTING OPTIONS: Specify Separately


Mounts	Code	
■ SUPER J-BOX 2.5" (64 mm) x 12" (305 mm)	SJ-XX*	
■ POST MOUNT 2.5" (64 mm) x 13" (330 mm)	PM-XX*	
■ PROAIM RATCHETING SPIKE 4.0" (102 mm) x 4.0" (102 mm)	PARS	
■ 3-PRONG SPIKE 5.1" (129 mm) x 9" (229 mm)	250020020000	
■ VERSABOX® 2.2" (57 mm) x 1.5" (39 mm)	VB-050-XX*	

*YY = riser height in inches (6" increments between 6" and 36"; 152 mm increments between 152 mm and 914 mm), XX = finish code

RISER OPTIONS: Specify Separately

Riser	Code	
■ RISER 1.0" (25 mm) Diameter	YY-R-GT-XX*	

LUXOR® TECHNOLOGY OPTIONS: Specify Separately

Cubes	Code	
■ LOW-VOLTAGE CUBE Supports AC dimmable LEDs and incandescent MAX LOAD: 60W/5A	LCM-LV	
■ RELAY/0-10V CUBE Supports relay switch MAX LOAD: 250VAC/5A	LCM-RLY-010V	