




*For a fixture that combines style with LED efficiency, the QF is the ideal choice. With precise machined angles and dominant lines, the QF is designed to be seen and appreciated.*

### QF: Path Light

NUMBER OF LEDs:	1	3	ZDC
HALOGEN LUMEN EQUIVALENT:	10 Watt	20 Watt	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	11 to 15V
VA TOTAL*:	2.4	4.5	7.2
WATTS USED:	2.0	4.2	6.0
LUMENS PER WATT (EFFICACY):	19	25	26
TOTAL LUMENS:	39	103	83
CRI (Ra):	86	67	84
CCT:			
AMBER FILTER	2700K	2700K	N/A
FROSTED FILTER	3900K	3900K	N/A
GREEN FILTER	4500K	4500K	N/A
BLUE FILTER	5200K	5200K	N/A

\*(Use this number to size the transformer)

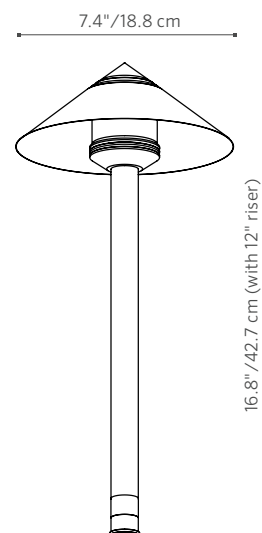



# QF: Path Light

**FACTORY INSTALLED OPTIONS (TOP+ RISER ASSEMBLY):** Order 1 + 2 + 3 + 4 (Optional) + 5 + 6 + 7

Step	Description	Code
1	TOP ASSEMBLY	QFLEDTA
2	TOP FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB
3	RISER TYPE	G
4	LUXOR OPTION	ZD, ZDC† (Color)
5	LAMP	1LED, 3LED, _____†
6	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 36RA (in inches)
7	FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB

**EXAMPLE: Top Assembly-Top Finish + Riser Type-Luxor Option-Lamp-Riser Height-Riser Finish**  
**QFLEDTA-FB + G-ZD-1LED-18RA-FB**


† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration.  
 Do not specify a number of LEDs when ordering.

**FIELD INSTALLED OPTIONS:** Order Individually

Mounting Options	
Long Slot Spike (250015840000) 2.5" x 10" <b>Included</b> ▶	
SuperJ-Box (SJ-XX**) 2.5" x 12"	
Post Mount (PM-XX**) 2.5" x 13"	
Versa Box (VB-050-XX**) 2.2" x 1.5"	
3-Prong Spike (250020020000) 5.1" Diam. x 9.0" tall	
	<p>Long Slot Spike      Super J-Box XX**      Post Mount XX**</p>

**EXAMPLE: 753900 = Super Slot Spike**

**PHOTOMETRICS:**

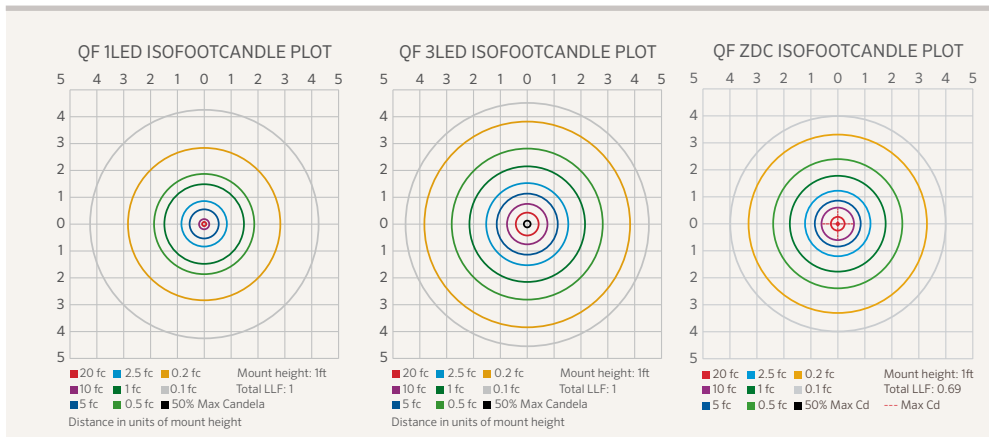

Beam angle is calculated using LM-79 method for SSL Luminaires:  
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

**METALS**

	<b>AB</b> = Antique Bronze* (On Brass/Copper)
	<b>AT</b> = Antique Tumbled* (On Brass/Copper)
	<b>CU</b> = Copper
	<b>NP</b> = Nickel Plate*

**POWDER COAT**

	<b>WG</b> = White Gloss
	<b>FW</b> = Flat White
	<b>AL</b> = Almond
	<b>BZ</b> = Bronze Metallic
	<b>DG</b> = Desert Granite
	<b>WI</b> = Weathered Iron
	<b>SB</b> = Sedona Brown
	<b>FB</b> = Flat Black

The QF and G-riser include choice of LED board, riser size and finish, 3 ft. lead wire and Long Slot Spike.

All QF path lights come standard with amber, green, blue and frosted filters

**Note:** Only the copper portions of the path lights are powder coated. The brass pieces remain natural, except on Antiqued or Nickel-plated finishes..

\* May require longer lead time  
 \*\* Denotes finish code