

TM LED Path Light **DESIGNER BASE**



PROJECT

CATALOG #


TYPE

NOTES

Designed for mid-sized landscapes, the TM provides unmatched elegance and function in the aluminum constructed category. Its small cap provides a stylish presentation, but doesn't compromise on shine. Not only does it accomplish the function of path lighting, it does so with grace and style.

Quick Facts

- Die-cast aluminum
- Two-layer marine-grade anodization and powder coat finish
- Lumileds® Integrated LEDs
- ProAim™ adjustability
- Compatible with Luxor® technology
- Phase and PWM dimmable
- Input voltage: 10-15V

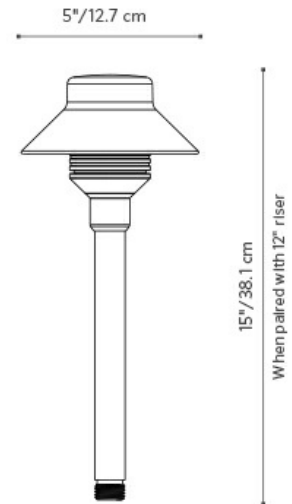

Note: Example model shown has a 12" riser.

Footcandles (Lux)	TM Path Light - Recommended Spacing			
	1 LED		3 LED	
	12" Riser	18" Riser	12" Riser	18" Riser
0.1 fc (1.1 lx)	10.0' (3.0 m)	12.0' (3.7 m)	12.0' (3.7 m)	15.0' (4.6 m)
0.3 fc (3.2 lx)	7.5' (2.3 m)	6.0' (1.8 m)	9.0' (2.7 m)	12.0' (3.7 m)
0.5 fc (5.4 lx)	5.0' (1.5 m)	4.5' (1.4 m)	8.2' (2.5 m)	9.5' (2.9 m)
0.8 fc (8.6 lx)	3.5' (1.1 m)	3.5' (1.1 m)	7.5' (2.3 m)	7.0' (2.1 m)
1.0 fc (10.8 lx)	3.0' (0.9 m)	3.0' (0.9 m)	6.5' (2.0 m)	6.0' (1.8 m)

0.1 fc (1.1 lx) minimum spacing recommended for residential projects
 0.3 fc (3.2 lx) minimum spacing recommended for commercial projects

TM LED Path Light SPECIFICATIONS

Output	1LED	3LED	ZDC
Total Lumens†	62	166	73
Input Voltage	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	1.9	4.0	6.0
Power Consumption (VA)	2.2	4.4	7.2
Efficacy (lm/W)	34	43	16
Color Rendering Index (CRI)	85	85	80+
Max Candela	55	91	41
Dimming			
Primary Dimming (Transformer)	Consult transformer specifications		
Secondary Dimming (Fixture)	Phase-cut**	Phase-cut**	Luxor
RGBW Available	No	No	Yes
Luxor Compatibility			
Default	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	Zoning/Dimming/Color
Minimum Rated Life L70 (Hrs)	72,000	72,000	55,000

**For optimal performance, use a trailing-edge, phase-cut dimmer.

†Measured using the 2,700K CCT option.

TM Path Light - Recommended Spacing

Footcandles (Lux)	1 LED		3 LED	
	12" Riser	18" Riser	12" Riser	18" Riser
0.1 fc (1.1 lx)	10.0' (3.0 m)	12.0' (3.7 m)	12.0' (3.7 m)	15.0' (4.6 m)
0.3 fc (3.2 lx)	7.5' (2.3 m)	6.0' (1.8 m)	9.0' (2.7 m)	12.0' (3.7 m)
0.5 fc (5.4 lx)	5.0' (1.5 m)	4.5' (1.4 m)	8.2' (2.5 m)	9.5' (2.9 m)
0.8 fc (8.6 lx)	3.5' (1.1 m)	3.5' (1.1 m)	7.5' (2.3 m)	7.0' (2.1 m)
1.0 fc (10.8 lx)	3.0' (0.9 m)	3.0' (0.9 m)	6.5' (2.0 m)	6.0' (1.8 m)

0.1 fc (1.1 lx) minimum spacing recommended for residential projects

0.3 fc (3.2 lx) minimum spacing recommended for commercial projects

TM LED Path Light SPECIFICATIONS

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast aluminum A380 housing, top/shade, and riser.

LED

Integrated LED module with Lumileds LEDs. Gold-plated connectors and conformal coated for maximum reliability and corrosion resistance. Proprietary on-board intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradeable and replaceable, the LEDs are rated to 72,000 hrs. Maximum drive current: 1 A.

Optics

Conical reflector maximizes distribution according to riser height. Color temperature lenses accessories available.

Threads

Machined aluminum with ½"-14 (13 mm) NPSM threads.

Finish

Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

Includes 12" (305 mm) ABS slotted installation spike.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length without riser.

Sockets

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Power

Input 10-15 VAC/VDC, 50/60Hz. Remote transformer required (specify separately).

Housing

Die-cast aluminum housing with capacity for 1LED, 3LED, or ZDC integrated LEDs.

Weight

4.0 lbs. (1.8 kg)

Lens

Frosted polycarbonate lens with high tolerance for thermal expansion, stress, and abuse.

International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-4 when used with International Spike Kit ("EKITSPIKE") or alternate mount greater than or equal to IP65.

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Installation Requirements

Designed for installation in the downward lighting direction only.

Control

Luxor ZD or ZDC options utilize Luxor technology to zone light fixtures in up to 250 groups, dim each group in 1% increments between 0 and 100%, or change to one of 30,000 colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard fixture is zoneable with Luxor.

Manufacturing

ISO 9001:2015 certified facility.








Warranty

10-Year Limited Warranty

Listings



TM LED Path Light ORDERING INFORMATION

Fixture	Top Finish	Riser	Luxor Option	Lamp	Riser Height	Finish
TMLEDTA	BZ Bronze Metallic	A (Aluminum)	[default] Zone	1 LED 2.0W/2.4VA	12RA	BZ Bronze Metallic 
	DG Desert Granite		ZD Zone/Dim	3 LED 4.0W/4.4VA	18RA	FB Black 
	WI Weathered Iron	ZDC Zone/Dim/Color	[default ZDC option] 6.0W/7.2VA	24RA	DG Desert Granite 	
	SB Sedona Brown				WI Weathered Iron 	
	FB Flat Black				SB Sedona Brown 	
	FW Flat White	FW Flat White 				
	SV Silver	SV Silver 				



EXAMPLE FIXTURE CONFIGURATION: **TMLEDTA**-XX-XXXX-XX












TM Path Light - Recommended Spacing

Footcandles (Lux)	1 LED		3 LED	
	12" Riser	18" Riser	12" Riser	18" Riser
0.1 fc (1.1 lx)	10.0' (3.0 m)	12.0' (3.7 m)	12.0' (3.7 m)	15.0' (4.6 m)
0.3 fc (3.2 lx)	7.5' (2.3 m)	6.0' (1.8 m)	9.0' (2.7 m)	12.0' (3.7 m)
0.5 fc (5.4 lx)	5.0' (1.5 m)	4.5' (1.4 m)	8.2' (2.5 m)	9.5' (2.9 m)
0.8 fc (8.6 lx)	3.5' (1.1 m)	3.5' (1.1 m)	7.5' (2.3 m)	7.0' (2.1 m)
1.0 fc (10.8 lx)	3.0' (0.9 m)	3.0' (0.9 m)	6.5' (2.0 m)	6.0' (1.8 m)

0.1 fc (1.1 lx) minimum spacing recommended for residential projects



0.3 fc (3.2 lx) minimum spacing recommended for commercial projects

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.		Mounts	Catalog No.	
Long Slot Spike	250015840000		Three-Prong Spike	250020020000	
Super Slot Spike	753900		Straight Coupling	COUP-XX*	
Ground Mount with 1/2" Thread	GM-XX*		Mini J-Box for 1/2" Thread	MJB-050-XX*	
ProAim® Ratcheting Spike	PARS		Super J-Box Spike	SJ-XX*	
VersaBox® Mount with 1/2" Thread	VB-050-XX*		Variable Height Riser for Up Lights	VHR-UL	
Aluminum Riser, 3/4" Diameter	YY*-R-XX*				

TM LED Path Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.		Power	Catalog No.	
Luxor Cube - Low voltage	LCM-LV		Plug-In Transformer, 6 W	MT-6W	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV		Lighting Fixture Surge Module	SURGE-MOD	