

A-HS Wall Light

LINE VOLTAGE



PROJECT

CATALOG #


TYPE

NOTES

With distinctive performance and a low-profile package, the A-HS recessed wall light adds a layer of elegance to any commercial space.

Quick Facts

- Unique Floor Graze (FG) or Performance Floor Wash (PW) optics
- Die-cast aluminum
- Input Voltage: 110-277V
- Two-layer, marine-grade anodization and powder coat finish

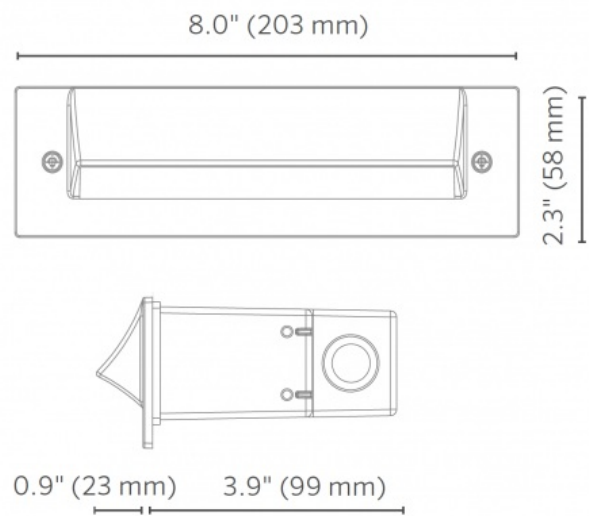

A-HS Wall Light SPECIFICATIONS

OUTPUT	L06 FG	L11 FG	L11 PW
Total Lumens*	372	530	691
Input Power (W)	8.2	12	11.7
VA	8.7	12.1	11.8
Efficacy (Lumens/Watt)	45	44	59
Color Rendering Index (CRI)	80+	80+	80+
Max Candela	403	4831	4895
Dimming	Phase**	Phase, 0-10V	Phase, 0-10V
Luxor® Compatibility			
ZD Options	Luxor CUBE Required	Luxor CUBE Required	Luxor CUBE Required
Minimum Rated Life (L70)	60,000 Hours	60,000 Hours	60,000 Hours
BUG Rating	BO-U3-G1	BO-U3-G2	BO-U2-G2

† Measurements taken with K30 3,000K source. For K40 4,000K data, divide by 0.92.

** For optimal performance, use a leading-edge or trailing-edge, phase-cut dimmer

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Warranty

Listings

A-HS Wall Light ORDERING INFORMATION


[field_spec_builder_mount] [field_spec_builder_mount]

Fixture	Faceplate	Finish
A-HS	LS Long Shield	BZ Bronze Metallic
		FB Black
		DG Desert Granite
		WI Weathered Iron
		SB Sedona Brown
		FW Flat White
		SV Silver





EXAMPLE FIXTURE CONFIGURATION: A-HS-XX-XXXX-XX

A-HS L11 FG Isofootcandle Plot

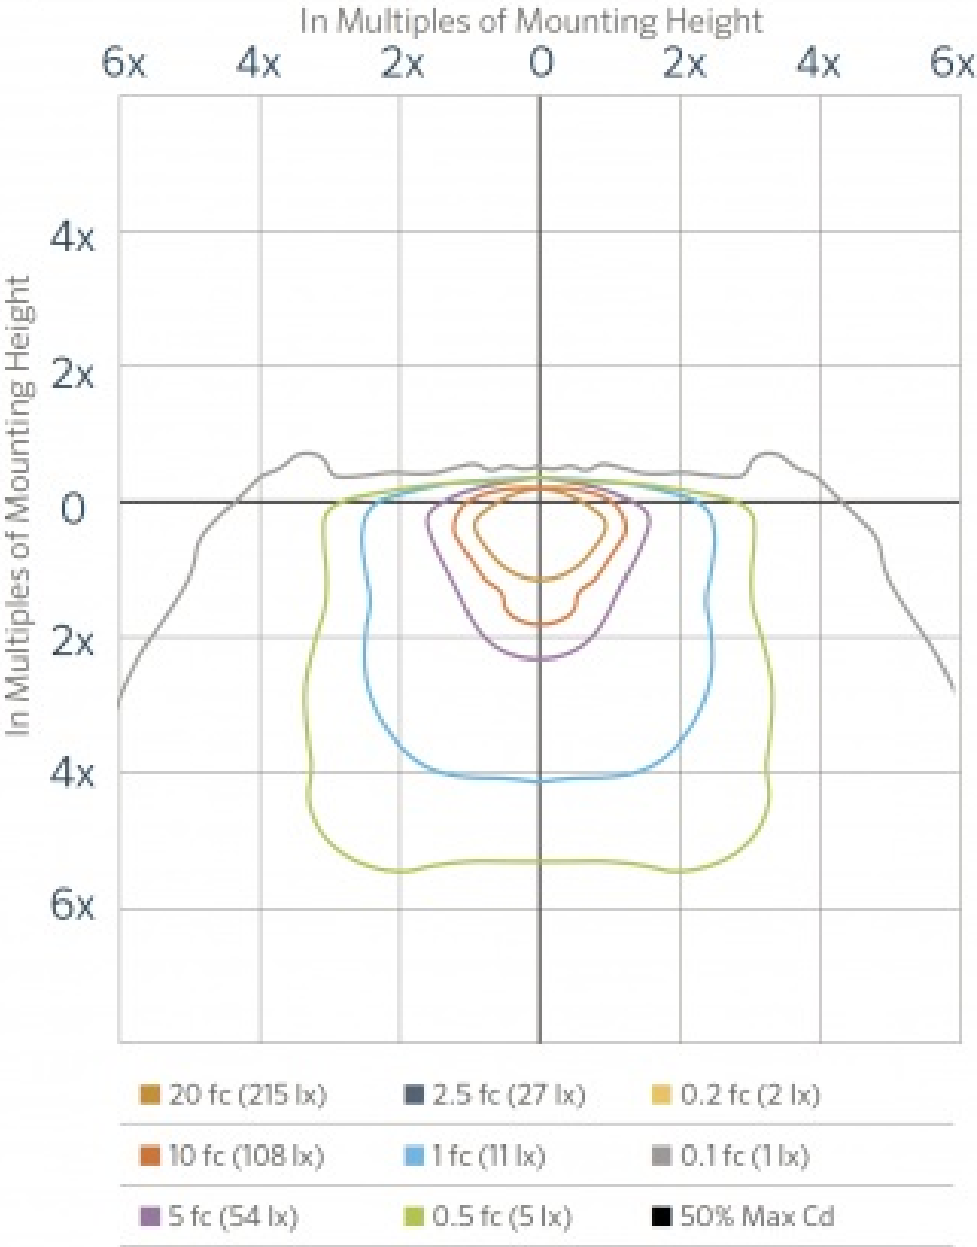


Distance in units of mounting height: 1.0'
(610 mm) Total LLF: 1.0

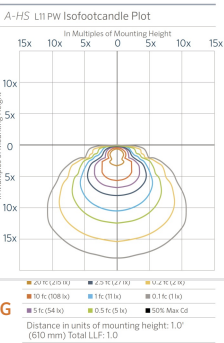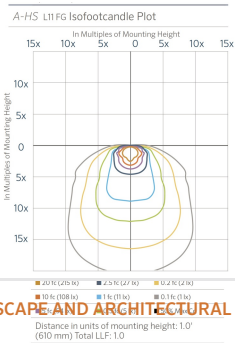

A-HS Wall Light ORDERING INFORMATION

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.		Mounts	Catalog No.
Mounting Kit for the HS and A-HS Recessed Wall Lights	MK-HS			

A-HS Wall Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.
	LCM-HV



Power	Catalog No.
Luxor Cube - Relay, 0-10V dimming	LCM-RLY-010V

