

A-NK4 Wall Light

LINE VOLTAGE




PROJECT
CATALOG #
TYPE
NOTES

Strength, versatility, and unmatched style come together in the A-NK4 recessed wall light to complement traditional, modern, and classical architecture and bring elegance to any commercial space.

Quick Facts

- Die-cast aluminum
- Lumileds® Luxeon® Z ES LED Array
- Two-layer, marine-grade anodization and powder coat finish
- Dimming: Phase or 0-10V
- Input voltage: 110-277V
- IP66/67
- Minimal visible hardware

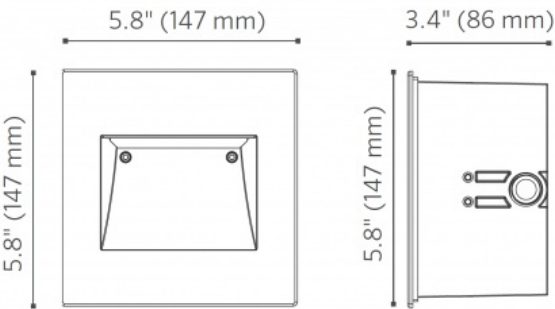

# A-NK4 Wall Light SPECIFICATIONS

OUTPUT	L04	L07
Total Lumens*	291	600
Input Power (W)	6.3	9.8
VA	6.8	10
Efficacy (Lumens/Watt)	46	61
Color Rendering Index (CRI)	80+	80+
Max Candela	385	559
Dimming	Phase, 0-10V	Phase, 0-10V
Minimum Rated Life (L70)	60,000 Hours	
Luxor® Compatibility		
ZD Options	Luxor CUBE Required	Luxor CUBE Required
IES Classification	Type II	Type II
BUG Rating	BO-U1-GO	BO-U3-G1

\* Lumen output does not change according to specified CCT. L04 measurements take with FB finish. L07 measurements taken with FW finish.

**About FX Luminaire**








As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

**Warranty**

**Listings**


# A-NK4 Wall Light ORDERING INFORMATION

[field\_spec\_builder\_mount] [field\_spec\_builder\_mount]

Fixture	Finish	
A-NK4	BZ Bronze Metallic	
	FB Black	
	DG Desert Granite	
	WI Weathered Iron	
	SB Sedona Brown	
	FW Flat White	
	SV Silver	



EXAMPLE FIXTURE CONFIGURATION: A-NK4-XX-XXXX-XX

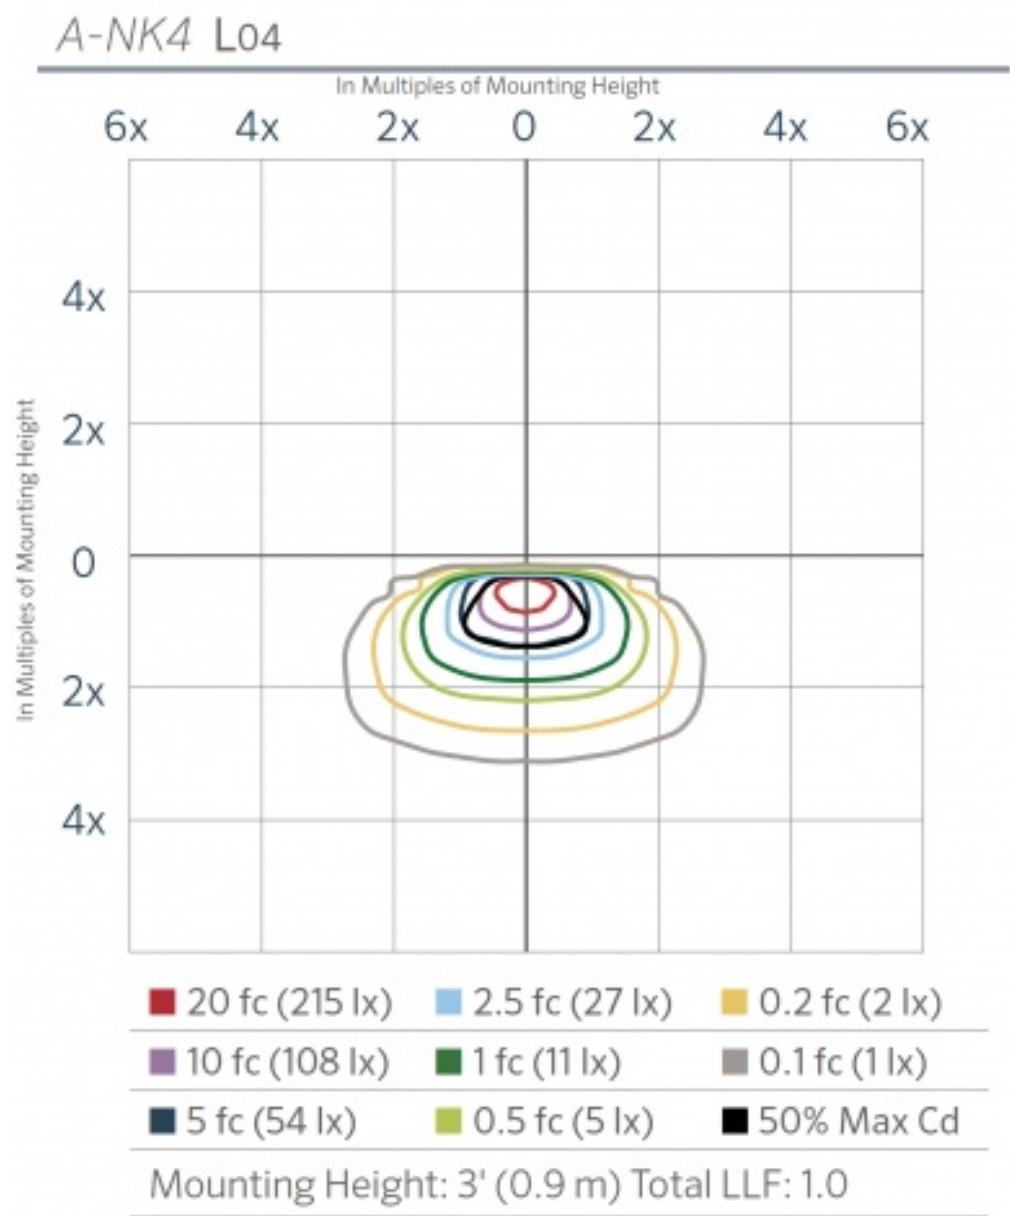

A-NK4 Wall Light ORDERING INFORMATION

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 35.1°	Horizontal 61.4°
0.5' (0.2 m)	2.1 fc (22.4 lx)	0.3' (0.1 m)	0.6' (0.2 m)
1.0' (0.3 m)	0.5 fc (5.6 lx)	0.6' (0.2 m)	1.2' (0.4 m)
1.5' (0.5 m)	0.2 fc (2.5 lx)	1.0' (0.3 m)	1.8' (0.5 m)
2.0' (0.6 m)	0.1 fc (1.4 lx)	1.3' (0.4 m)	2.4' (0.7 m)
2.5' (0.8 m)	0.1 fc (0.9 lx)	1.6' (0.5 m)	3.0' (0.9 m)
3.0' (0.9 m)	0.1 fc (0.7 lx)	2.0' (0.6 m)	3.6' (1.1 m)

MOUNTING OPTIONS: Specify Separately

Mounts

Catalog No.

Mounts


Catalog No.

Mounting Kit for the A-NK4 Recessed Wall Light

MK4NK4



A-NK4 L07

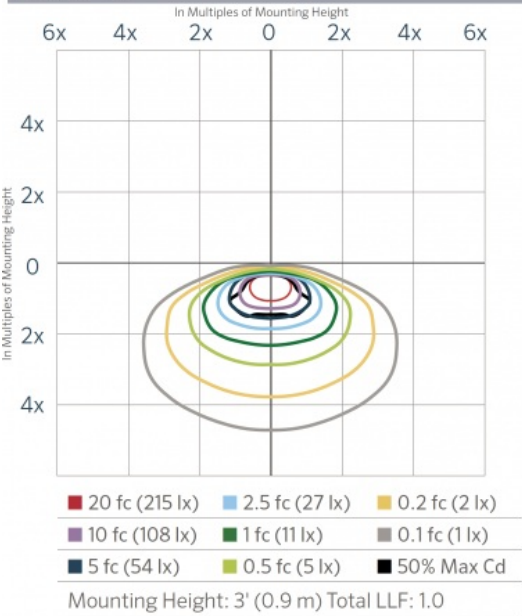


A-NK4 L07

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 37.4°	Horizontal 68.2°
0.5' (0.2 m)	3.1 fc (33.2 lx)	0.3' (0.1 m)	0.7' (0.2 m)
1.0' (0.3 m)	0.8 fc (8.3 lx)	0.7' (0.2 m)	1.4' (0.4 m)
1.5' (0.5 m)	0.3 fc (3.7 lx)	1.0' (0.3 m)	2.0' (0.6 m)
2.0' (0.6 m)	0.2 fc (2.1 lx)	1.4' (0.4 m)	2.7' (0.8 m)
2.5' (0.8 m)	0.1 fc (1.3 lx)	1.7' (0.5 m)	3.4' (1.0 m)
3.0' (0.9 m)	0.1 fc (1.0 lx)	2.0' (0.6 m)	4.1' (1.2 m)

# A-NK4 Wall Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.
	LCM-HV 

Power	Catalog No.
Luxor Cube - Relay, 0-10V dimming	LCM-RLY-010V 