

VC Down Light

DESIGNER PLUS



PROJECT

CATALOG #


TYPE

NOTES

The low-profile VC provides a quick and simple method for ceiling installations and features advanced dimming and control capabilities via Luxor® technology.

Quick Facts

- Marine-grade aluminum with low-glare powder-coated finish
- Compatible with Luxor technology
- Phase and PWM dimmable
- Input voltage: 10-15V

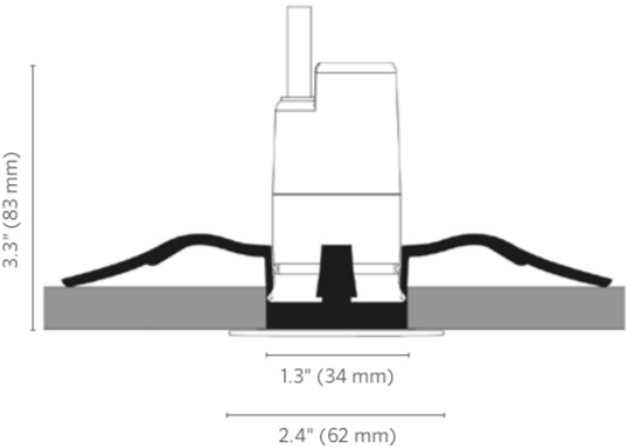

Output	1LED
Total Lumens	156
Input Voltage	10 to 15V
Input Power (W)	2.8
VA	3.3
Efficacy (Lumens/Watt)	56
Color Rendering Index (CRI)	80+
Center Beam Candlepower	436
Dimming	PWM, Phase
RGBW Available	No
Luxor Compatibility	
Default	--
ZD Option	Zoning/Dimming
ZDC Option	--
Minimum Rated Life (L70 B10)	55,000 Hrs avg

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Warranty

Listings

[field\_spec\_builder\_mount] [field\_spec\_builder\_mount]

Fixture	Control	Power	Finish
VC	ZD Zone/Dim with Luxor	1 LED 1.9W/2.2VA	FW Flat White

-

-

-

EXAMPLE FIXTURE CONFIGURATION: VC-XX-XXXX-XX

VC 1LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candle (Lux)	Vertical 33.8°
2.0' (0.6 m)	107.0 fc (1,152 lx)	1.2' (0.4 m)
4.0' (1.2 m)	26.8 fc (289 lx)	2.4' (0.7 m)
6.0' (1.8 m)	11.9 fc (128 lx)	3.6' (1.1 m)
8.0' (2.4 m)	6.7 fc (72 lx)	4.9' (1.5 m)
10.0' (3.1 m)	4.3 fc (46 lx)	6.1' (1.9 m)
12.0' (3.7 m)	3.0 fc (31 lx)	7.3' (2.2 m)

