


SIDE

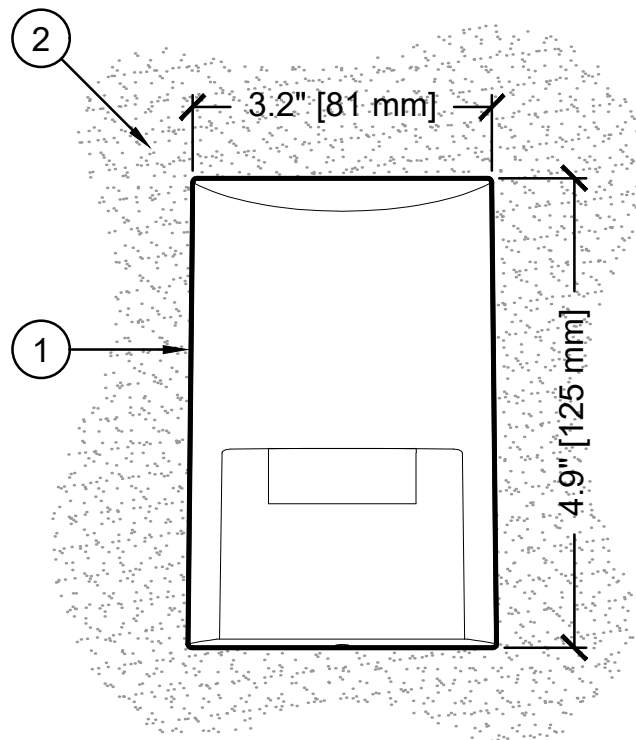


FRONT

## DETAIL LEGEND:

- ① FX LUMINAIRE "SL" FIXTURE PER PLAN
- ② WALL OR MOUNTING SURFACE
- ③ MOUNTING BRACKET
- ④ JUNCTION BOX. LIMITS (WIDTH X HEIGHT): 2" [51 mm] X 4" [102 mm]
- ⑤ ELECTRICAL CONDUIT PER LOCAL CODE
- ⑥ DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE

## NOTES

- A. FIXTURE REQUIRES 11-15V AC/DC
- B. INSTALL TO A UL 1838 (IEC/EN 61347) LISTED TRANSFORMER
- C. INSTALL FIXTURE IN THE DOWNWARD LIGHTING DIRECTION AND IN VERTICAL SURFACES ONLY
- D. FOR LUXOR CONTROL, ASSIGN FIXTURE OR LUXOR CUBE® TO APPROPRIATE GROUP NUMBER PRIOR TO INSTALLATION UNLESS USING THE LIGHT ASSIGNMENT MODULE (LAM).



SL ROUND

**FXLuminaire.** W.SL-RD.01

NOT TO SCALE

REV: 2019-10-02