




Beam angle optics offer design flexibility to deliver a wider beam spread. Narrow, flood, and wide flood lenses can be adjusted to your preference, ranging from 18° to 58°. Like our color filters, these laser-cut lenses attach to the LED reflector with a simple twist/lock installation, using the same FX LED technology platform.


Beam Angle Lenses

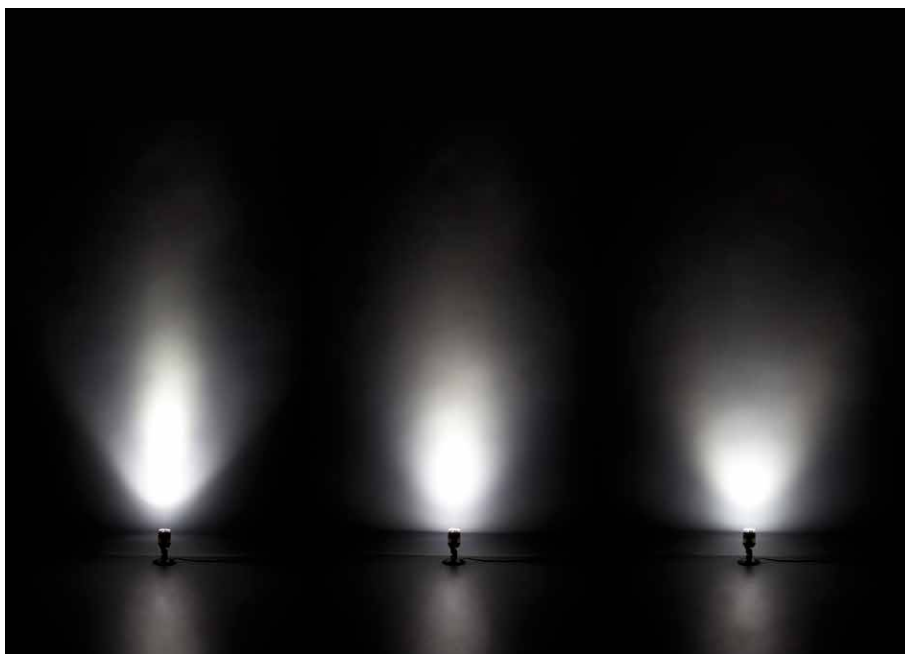


DIFFUSER 18°

FLOOD LENS 30°-32°


WIDE FLOOD LENS 56°-58°



DIFFUSER 18°



FLOOD LENS 30°-32°



WIDE FLOOD LENS 56°-58°




Beam Angle Lenses

LENS OPTIONS	DEGREE	1 LED	3 LED	6/9 LED
DIFFUSER*	18°	770600	771300	771600
FLOOD LENS <i>(1 notch)</i>	30°-32°	1LEDFLENS	3LEDFLENS	9LEDFLENS
WIDE FLOOD LENS <i>(2 notches)</i>	56°-58°	1LEDWFLENS	3LEDWFLENS	9LEDWFLENS

*Diffuser (18°) ships preassembled in most fixtures

PHOTOMETRICS: †

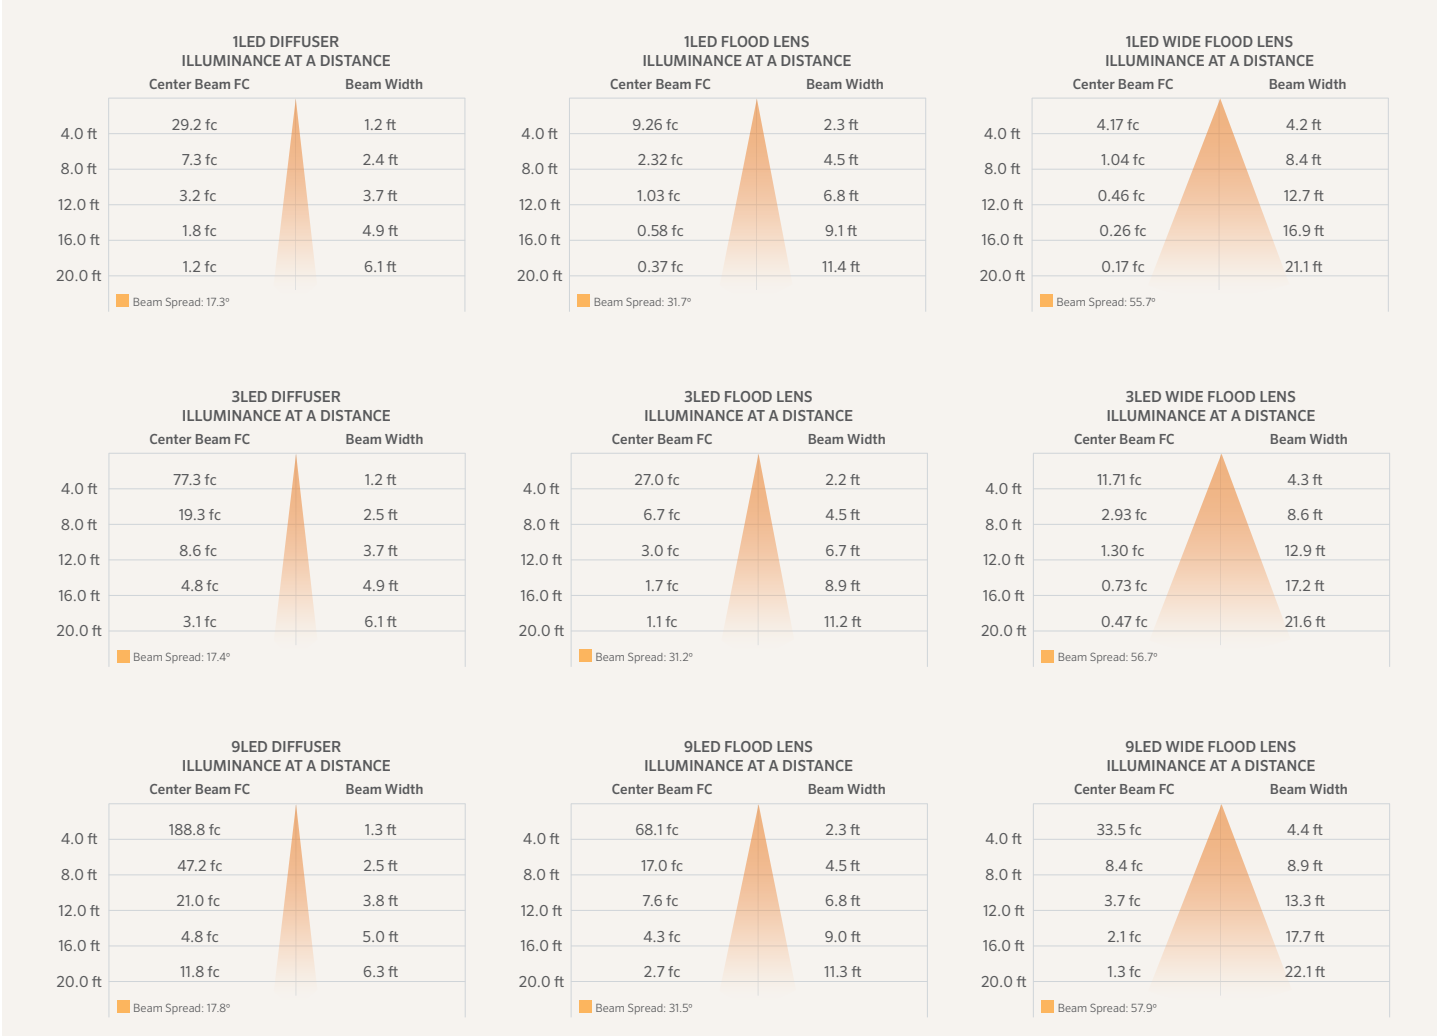

† Actual photometrics vary depending on the selected fixture.