FXLuminaire.


LED Up Lights



Our largest wall-wash up light, the LC, projects a broad spectrum of light on large walls and spaces. It is available in 1, 3, 6 and 9LED, and is available in an array of finishes to suit the needs of any design that calls for a large-span wall washing up light.

LC: Up Light

NUMBER OF LEDS:	1	3	6	9
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt	20 Watt	35 Watt	50 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	10 to 15V	10 to 15V
VA TOTAL: (Use to size the lighting controller)	2.4	4.5	13.5	13.5
WATTS USED:	2.0	4.2	10.1	11.2
LUMENS PER WATT (EFFICACY)	30.9	36.5	36.1	36.8
MAX LUMENS:	63	154	331	436
CRI (Ra)	82.8	80.2	82.2	79.2



ORDERING INFORMATION



FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4

			Statement Statements	
Step	Step Description Code			A (0
1	FIXTURE	LC	14.34.5	
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)	and a	A ' (C
3	LAMP	1LED, 3LED, 6LED, 9LED (50,000 avg. life hours)		
4	FINISH	AB*, AT*, NP*, BS, WG, FW, AL, BZ, DG, WI, VF, SB, FB		N


EXAMPLE: LC-ZD-3LED-BZ = LC - ZD Option - 3LED Board - Bronze Metallic Finish

FIELD INSTALLED OPTIONS: Order Individually



EXAMPLE: 753900 = Super Slot Spike

PHOTOMETRICS:





0.4 fc


Vertical Spread: 81.7° Horizontal Spread: 90.9°

24.0 ft

41.5 ft 48.8 ft

Beam angle is calculated using LM-79 method for SSL Luminaires:

"Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

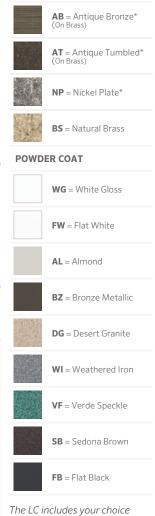

METALS

LED boards, choice of finish, 4 ft. lead wire and a Long Slot Spike.



All LC up lights come standard with amber, green, blue and frosted filters

* May require longer lead time

** Denotes finish code



