




*Thanks to its unique hook design, the innovative LE can illuminate a space from above without the need for a large mount. Create a moonlight effect over seating areas, under table umbrellas, or even under tree branches. Use the four color filters included for enhanced lighting effects.*

## LE: Down Light

NUMBER OF LEDS:	1
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V
VA TOTAL: (Use this number to size the transformer)	2.4
WATTS USED:	2.0
LUMENS PER WATT (EFFICACY)	22.6
MAX LUMENS:	55
CCT (Ra)	80.8

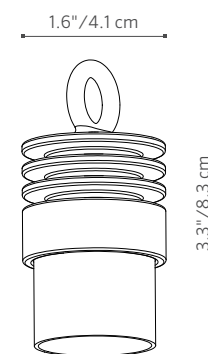



# LE: Down Light


< ALUMINUM

**FACTORY INSTALLED OPTIONS:** Order 1 + 2 (optional) + 3 + 4

Step	Description	Code
1	FIXTURE	LE
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED (50,000 avg. life hours)
4	FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB





**EXAMPLE:** LE-ZD-1LED-BZ = LE - ZD Option - 1 LED Board - Bronze Metallic Finish

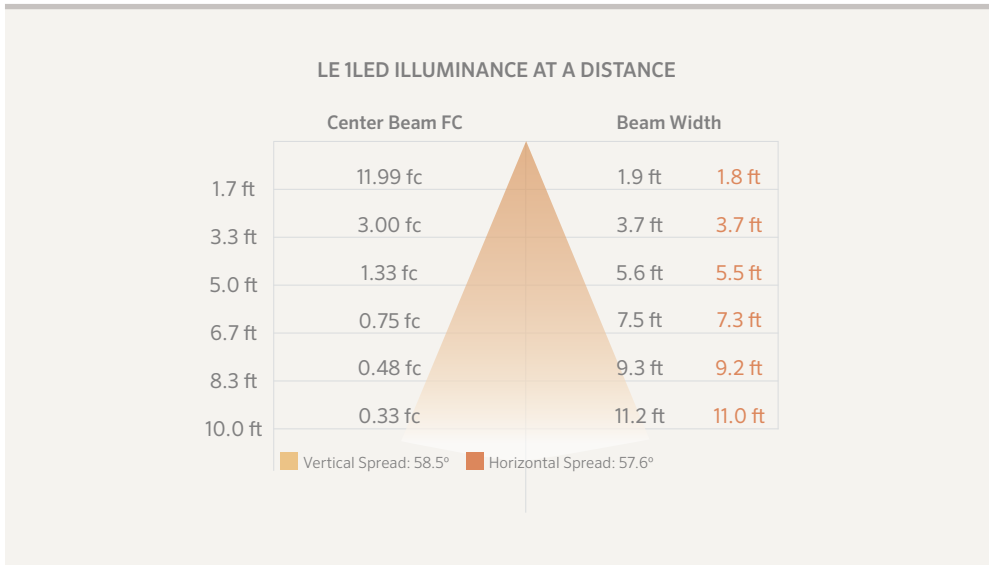**PHOTOMETRICS:**












Beam angle is calculated using LM-79 method for SSL Luminaires:  
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."


**METALS**

-  **AB** = Antique Bronze\*
-  **AT** = Antique Tumbled\*
-  **CU** = Copper
-  **NP** = Nickel Plate\*

**POWDER COAT**

-  **WG** = White Gloss
-  **FW** = Flat White
-  **AL** = Almond
-  **BZ** = Bronze Metallic
-  **DG** = Desert Granite
-  **WI** = Weathered Iron
-  **VF** = Verde Speckle
-  **SB** = Sedona Brown
-  **FB** = Flat Black

The LE includes a 1LED board, choice of finish, a stainless steel hanging cable and 23 ft. lead wire.



\* May require longer lead time

