



PROJECT

CATALOG #

TYPE

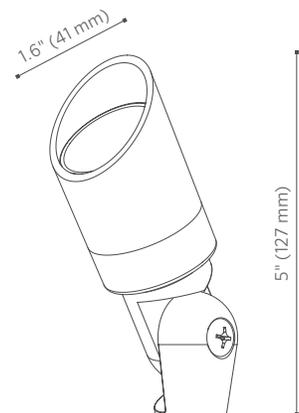
NOTES

MP Up Light STANDARD PLUS

The MP is the smallest up light in the FX Luminaire family. This fixture accepts MR-11 lamps.

Quick Facts

- Die-cast zinc/aluminum alloy
 - TGIC powder-coat finish
 - MR-11 lamp type
- ProAim® adjustability
 - Tamper-resistant features
 - Phase dimmable
 - Input voltage: 10 to 15 V



MP Up Light SPECIFICATIONS

Output	ECO20WFL	ECO20SFL
Total Lumens	157	177
Input Voltage	12 V	12 V
Input Power	2.0 W	2.0 W
Power Consumption (VA)	2.9 W	2.9 W
Efficacy (lm/W)	75	87
CRI (Ra)	86	87
Center Beam Candlepower (CBCP)	324	386
CCT	2,700K	3,000K
Beam Angle	35°	35°
Dimming		
Primary Dimming (Transformer)	Consult transformer specifications	
Secondary Dimming (Luminaire)	Phase-cut**	Phase-cut**
Minimum Rated Life L70 (Hrs)	25,000	25,000

** For optimal performance, use a trailing-edge (reverse phase-cut) dimmer.

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast zinc/aluminum alloy housing, shroud, and knuckle with stainless steel hardware.

Lamp

GU4 lamp base. Preinstalled options include MR-11 LED lamp.

Hardware

Stainless steel angle lock screw with setscrew. Includes 10" (254 mm) ABS slotted installation spike.

Socket

GU4 socket with retaining clips for MR-11 lamps. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 16" (405 mm) length

Power

Input 10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Housing

Die-cast zinc/aluminum alloy housing with capacity for one standard MR-11 lamp.

Shroud

Die-cast zinc/aluminum alloy shroud with 15° cutoff.

Knuckle

Die-cast zinc/aluminum alloy knuckle with ½"-14 (13 mm) NPSM threads. Compress and lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical adjustment.

Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.

Finish

Two-layer protection of sulfuric acid anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Installation Requirements

Designed for installation in the upward direction only.

Control

Zoning and dimming available with use of Luxor® Technology and Luxor Low-Voltage CUBE (LCM-LV). Luxor Technology allows up to 250 groups, dimmable in 1% increments between 0 and 100%.

Weight

1.3 lbs (0.6 kg)

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Warranty

10-year limited warranty on fixture; 3-year limited warranty on LED lamp

Listings



MP Up Light ORDERING INFORMATION

Fixture	Lamp	Finish
MP*	■ NL No Lamp	■ BZ Bronze Metallic  ■ FB Black 
	■ ECO20WFL LED 2 W, Warm 2,700K, Flood	■ DG Desert Granite  ■ WG White Gloss 
	■ ECO20SFL LED 2 W, Soft 3,000K, Flood	■ WI Weathered Iron  ■ FW Flat White 
		■ SB Sedona Brown  ■ AL Almond 
		■ SV Silver 

EXAMPLE FIXTURE CONFIGURATION:

MP-ECO20WFL-FB

* Ships with Super Slot Spike.



MP Up Light ORDERING INFORMATION



MOUNTING OPTIONS: Specify Separately

Item	Code	
■ SUPER J-BOX 2.5" (64 mm) x 12" (305 mm)	SJ-XX*	
■ POST MOUNT 2.5" (64 mm) x 13" (330 mm)	PM-XX*	
■ VERSABOX® 2.2" (57 mm) x 1.5" (39 mm)	VB-050-XX*	
■ GUTTER MOUNT 4.0" (102 mm) x 4.0" (102 mm)	GM-SS	
■ PROAIM RATCHETING SPIKE 4.0" (102 mm) x 4.0" (102 mm)	PARS	
■ SUPER SLOT SPIKE 2.5" (64 mm) x 10" (254 mm)	753900	
■ MINI J-BOX 3.5" (89 mm) x 1.3" (34 mm)	MJ-050-XX*	
■ MINI MOUNT 2.6" (65 mm) x 1.3" (320 mm)	MM-050-XX*	

RISER OPTIONS: Specify Separately

Item	Code	
■ RISER 0.8" (21 mm) Diameter	YY**-R-XX*	

LUXOR TECHNOLOGY OPTIONS: Specify Separately

Item	Code	
■ LOW-VOLTAGE CUBE Supports AC dimmable LEDs and incandescent MAX LOAD: 60 W/5 A	LCM-LV	
■ RELAY 0 TO 10 V CUBE Supports relay switch MAX LOAD: 250 VAC/5 A	LCM-RLY-010V	

COUPLING OPTIONS: Specify Separately

Item	Code	
■ STRAIGHT 1.3" (32 mm) x 2.0" (51 mm)	COUP-XX*	
■ 90° ELBOW 1.3" (32 mm) x 2.0" (51 mm)	ELBW-050-XX*	
■ T-MOUNT 3.0" (76 mm) x 2.2" (57 mm)	TMNT-050-XX*	

*XX = Finish code

**YY = Riser height in inches (6" increments between 6" and 36"; 150 mm increments between 150 mm and 915 mm).

© 2021 Hunter Industries™. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.