



PROJECT

CATALOG #

TYPE


NOTES

QL Down Light DESIGNER BASE

At 1.5" (38 mm) wide, the compact QL down light is ideal for mounting on decks, fences, and narrow surfaces.

Quick Facts

- Tamper-resistant features
- Two-layer, marine-grade anodization and powder-coat finish
- Die-cast aluminum
- Cree® integrated LED
- Input voltage: 10-15V
- Phase and PWM dimmable
- Compatible with Luxor® technology

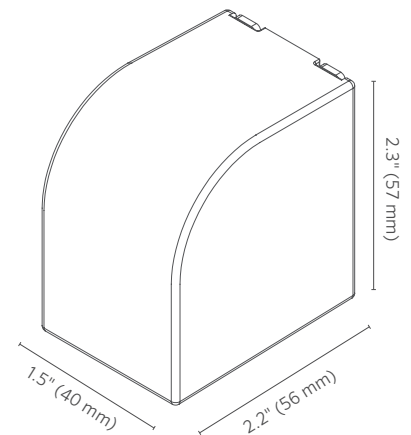

QL Down Light SPECIFICATIONS

Output	1LED
Total Lumens [†]	53
Input Voltage	10 to 15V
Input Power (W)	2.0
VA	2.4
Efficacy (Lumens/Watt)	27
Color Rendering Index (CRI)	80+
Center Beam Candlepower*	
Spot (17-20)	51
Dimming	PWM, Phase**
RGBW Available	No
Luxor Compatibility	
Default	Zoning
ZD Option	Zoning/Dimming
ZDC Option	--
Minimum Rated Life (L90 B10)	55,000 Hrs

* Information not available for Flood or Wide Flood.

** For optimal performance, use a trailing-edge, phase-cut dimmer.

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast A380 aluminum body with stainless steel setscrew, mounting bracket, and fasteners.

Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length

Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Lamp

Integrated module with Cree LEDs. Gold-plated connectors and conformal coating for maximum reliability and corrosion resistance. Proprietary onboard intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradeable and replaceable, the LEDs are rated to 55,000 hrs. Maximum drive current: 1 A.

Weight

0.36 lbs. (0.16 kg)

Hardware

Stainless steel mounting plate and two screws included.

Optics

Polycarbonate color temperature adjustment lens included with fixture: 2,700K (preinstalled) and 3,900K (no lens). Interchangeable optics for 10°, 20°, 30°-32°, or 55-58° (preinstalled) distributions available. Color temperature and beam angle lenses field serviceable.

Housing

Die-cast A380 aluminum body with capacity for 1LED integrated LED board.

Lens

Polycarbonate clear lens with shock resistance and high tolerance for thermal expansion and stress.

Finish

Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Ambient Operating Temperature

0°F to 140°F (-17°C to 60°C)

Installation Requirements

Designed for installation in the downward direction only.

Control

ZD utilizes Luxor technology to zone fixtures in up to 250 groups and dim each group in 1% increments between 0 and 100. Select the ZD option for zoning/dimming. Standard fixture is zoneable with Luxor controller.

International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-7 by selecting the "e" option in the parts builder.

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Warranty

10-year limited warranty

Manufacturing

ISO 9001:2015 certified facility

Listings



QL Down Light ORDERING INFORMATION

Fixture	Luxor Option	Output	Compliance	Finish
QL	■ [default] Zone	■ 1LED 53 Lumens	■ [default] North America (UL Listed)	■ BZ Bronze Metallic 
	■ ZD Zone/Dim		■ e Int'l (CE Certified)	■ DG Desert Granite 
				■ WI Weathered Iron 
				■ SB Sedona Brown 
				■ FB Black 
				■ WG White Gloss 
				■ FW Flat White 
				■ AL Almond 
				■ SV Silver 

EXAMPLE FIXTURE CONFIGURATION: QL-ZD-1LED-FB




QL Down Light PHOTOMETRICS

QL 1LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
		Vertical 59.0°	Horizontal 54.8°
1' (0.3 m)	50.6 fc (545 lx)	1.1' (0.3 m)	1.0' (0.3 m)
2' (0.6 m)	12.6 fc (135 lx)	2.3' (0.7 m)	2.1' (0.6 m)
3' (0.9 m)	5.6 fc (60 lx)	3.4' (1.0 m)	3.1' (1.0 m)
4' (1.2 m)	3.2 fc (35 lx)	4.5' (1.4 m)	4.1' (1.3 m)
5' (1.5 m)	2.0 fc (22 lx)	5.7' (1.7 m)	5.2' (1.6 m)
6' (1.8 m)	1.4 fc (15 lx)	6.8' (2.1 m)	6.2' (1.9 m)

QL 1LED Isofootcandle Plot

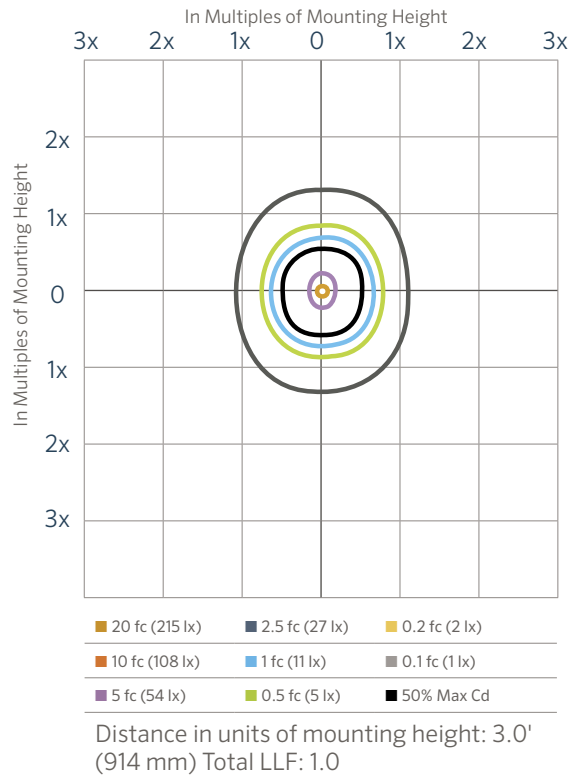

Cree is a registered trademark of Cree Inc. MoistureBlock is a trademark of DSM&T Co. Inc.

© 2020 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.