



INSTALL FX LUMINAIRE MICROLITE
AS SHOWN USING 16 GAUGE
CABLE AND PROVIDED WIRE
NUTS. PLASTIC 2" DIA. EMT
TUBING CAN BE DRILLED FOR
1/2" CONDUIT USING A 7/8"
HOLE SAW.

FX LUMINAIRE MICROLITE FIXTURE
INCORPORATES A REMOVABLE CAP
FOR LAMP REPLACEMENT, AND
SOLID BRASS BODY THAT SLIDES
INSIDE A 2" DIA. PLASTIC EMT
SLEEVE (NOT SUPPLIED WITH
PRODUCT) USED FOR
PRE-INSTALLATION ALIGNMENT.
THIS INSTALLATION MAKE
ADJUSTMENTS TO THE WALL A
PERFECT MATCH.

WATERPROOF SLEEVE END TO
PREVENT WATER FROM SEEPING
THROUGH THE WALL AND INTO
THE LAMP HOUSING.

BLUE OR GRAY PLASTIC ENT
CONDUIT WITH STRANDED THHN
WIRE SIZED TO MATCH WATTAGE
LOAD.

THIS FIXTURE IS DESIGNED
FOR DOWN LIGHTING ONLY.
DO NOT USE IN UP LIGHT
POSITION.

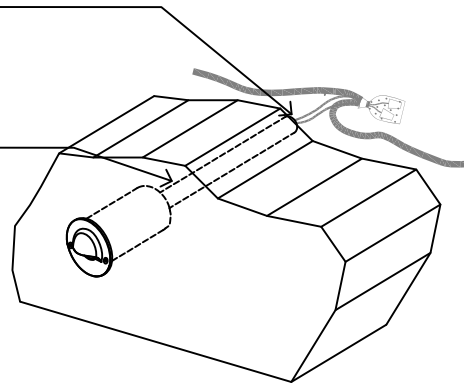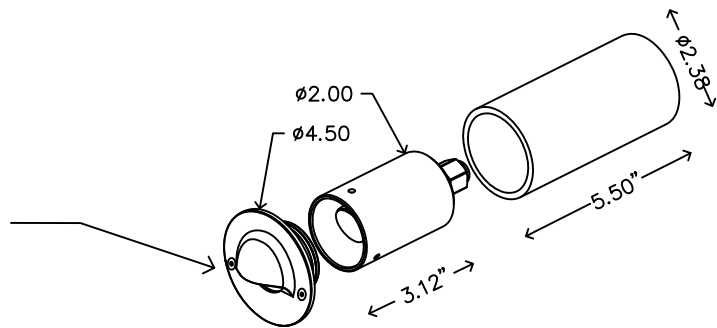

SECTION/ELEVATION

XX MICROLITE(ML)
POURED CONCRETE MOUNT
NOT TO SCALE FX LUMINAIRE DETAIL