


DETAIL LEGEND

- ① FX Luminaire VE fixture. See plan legend for wattage, beam spread and accessories.
- ② Wood, steel, aluminum joist.
- ③ Kwik-Loc connector. Model # KL 50
- ④ Length of wire and cable to be determined.
- ⑤ Direct bury, AWG 10/2 copper, low voltage cable with 3M DBR/Y-6 direct bury splice kit. Leave 18" minimum wire loop coiled below fixture for service.

NOTES

- A. Installation to be completed in accordance with manufacturer's specifications.
- B. Accepts 10-15 volts - AC or DC
- C. See plan legend for LED board option, beam spreads, and accessories.
- D. Always refer to FX product installation notes prior to installation.

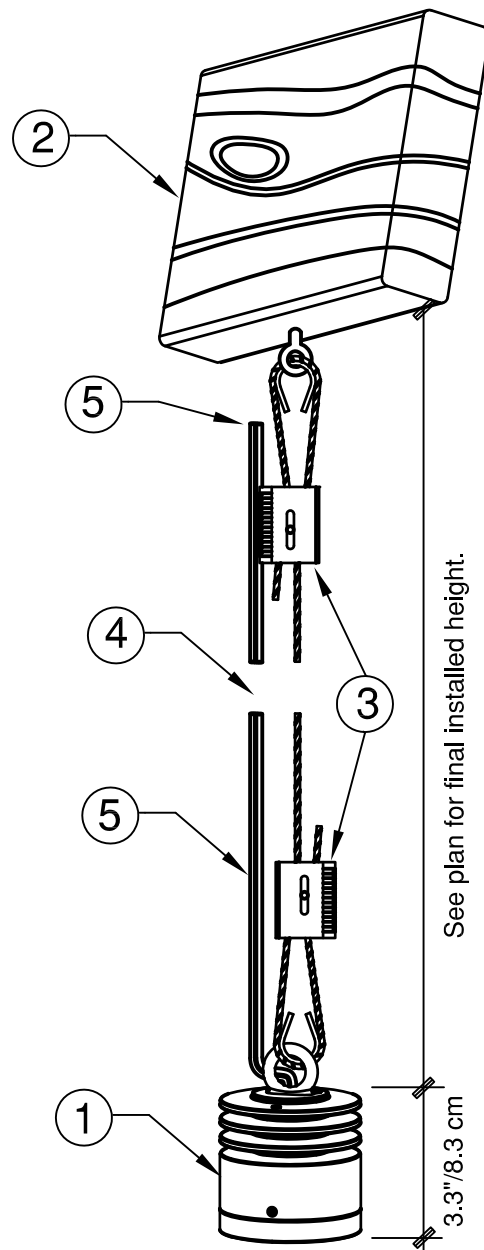

VE FIXTURE KWIK-LOC MOUNT

NOT TO SCALE