


LEGEND:

- ① FLAT MOUNTING SURFACE
- ② JUNCTION BOX AND CONDUIT
- ③ HEAT SHRINK WIRE CONNECTION PER MANUFACTURER
- ④ DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE

NOTES:

- A. FIXTURE REQUIRES 11-15V AC/DC
- B. INSTALL TO A UL 1838 (IEC/EN 61347) LISTED TRANSFORMER

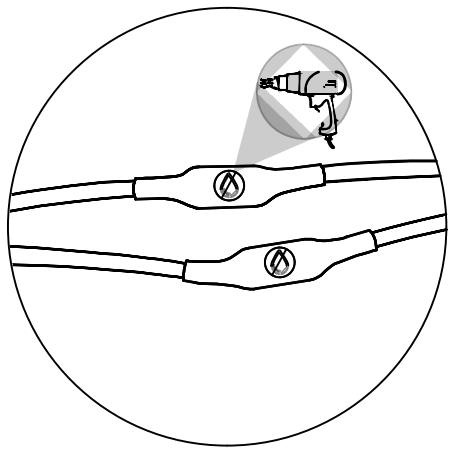

HEAT SHRINK WIRE CONNECTION